




											W	K	mA	Lm	%Eff
SALT 3	A220-03-	1 -1-	WW	WG	WR	NW	NG	NR			23,5W	3000K	700	2850	64%
	A220-03-	1 -2-	WW	WG	WR	NW	NG	NR			23,5W	4000K	700	3000	64%
SALT 4	A220-04-	② -1-	WW	WG	WR	NW	NG	NR	▒▒▒		34,5W	3000K	1050	4450	64%
	A220-04-	② -2-	WW	WG	WR	NW	NG	NR	▒▒▒		34,5W	4000K	1050	4700	64%
SALT 5	A220-05-	② -1-	WW	WG	WR	NW	NG	NR	▒▒▒		47,5W	3000K	1200	5900	64%
	A220-05-	② -2-	WW	WG	WR	NW	NG	NR	▒▒▒		47,5W	4000K	1200	6200	64%
SALT 6	A220-06-	② -1-	WW	WG	WR	NW	NG	NR	▒▒▒		60,5W	3000K	1050	7550	64%
	A220-06-	② -2-	WW	WG	WR	NW	NG	NR	▒▒▒		60,5W	4000K	1050	8000	64%

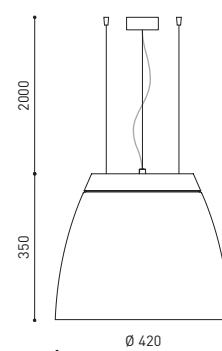

② OPTIONS*

2	DIM Push
3	DIM 1-10V
4	DIM DALI



WW



WG



WR



NW



NG



NR

SALT 3000 K

LED 77° | 3000 K

C90 - C270	23,5 W				34,5 W				47,5 W				60,5 W			
	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)
 CIE η L: 0.64 68-88-97-100-64 DIN A50 UTE 0.64 C CIBSE BZ 2 / 1.00 / BZ 3 η = 64%	1	1.57	591	1043	1	1.57	923	1628	1	1.57	1224	2159	1	1.57	1566	2763
	2	3.14	147	260	2	3.14	230	407	2	3.14	306	539	2	3.14	391	690
	3	4.72	65	115	3	4.72	102	180	3	4.72	136	239	3	4.72	174	307
	4	6.29	36	65	4	6.29	57	101	4	6.29	76	134	4	6.29	97	172

SALT 4000 K

LED 77° | 4000 K

C90 - C270	23,5 W				34,5 W				47,5 W				60,5 W			
	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)	h (m)	d (m)	E _{med} (lux)	E _{max} (lux)
 CIE η L: 0.64 68-88-97-100-64 DIN A50 UTE 0.64 C CIBSE BZ 2 / 1.00 / BZ 3 η = 64%	1	1.57	622	1097	1	1.57	975	1720	1	1.57	1286	2269	1	1.57	1660	2927
	2	3.14	155	274	2	3.14	243	430	2	3.14	321	567	2	3.14	415	731
	3	4.72	69	121	3	4.72	108	191	3	4.72	142	252	3	4.72	184	325
	4	6.29	38	68	4	6.29	60	107	4	6.29	80	141	4	6.29	103	182